




SAFEWOOD
DESIGNS

BALLISTIC GLASS CLAD LAMINATE

SWD 005 LS 1-5/8"

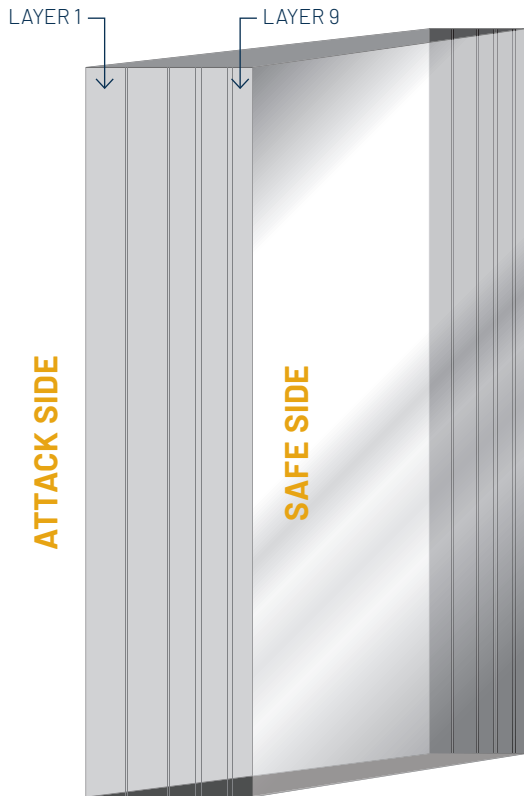

PRODUCT MAKEUP

- Layer 1: 3/8" Glass
- Layer 2: .025 Urethane
- Layer 3: 3/8" Glass
- Layer 4: .025 Urethane
- Layer 5: 1/4" Glass
- Layer 6: .05 Urethane
- Layer 7: 1/4" Polycarbonate
- Layer 8: .05 Urethane
- Layer 9: 3/16" Glass

OPTIONS

- Tinted Glass (Gray, Bronze, Green, Blue)
- Reflective Glass
- One-way Mirror
- Translucent
- White Interlayer (Frosted Glass)
- Wire Glass; Insulating Units; Low E
- *More Option Available

Size and Thickness may not be available for every option

TECHNICAL DETAILS

- Ballistic UL 752 Level 5
- Nominal Thickness: 1.6"
- Nominal Weight: 17.3 lbs/ square foot
- Light Transmission: 67%
- Dimensional Tolerance: ASTM C 1349

STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings
ASTM C 1036 Standard Specification for Flat Glass
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass



sales@SafeWoodDesigns.com



844.896.1800



www.SafeWoodDesigns.com