




**SAFEWOOD**  
DESIGNS

# BALLISTIC GLASS CLAD LAMINATE

SWD 005 1-3/8"

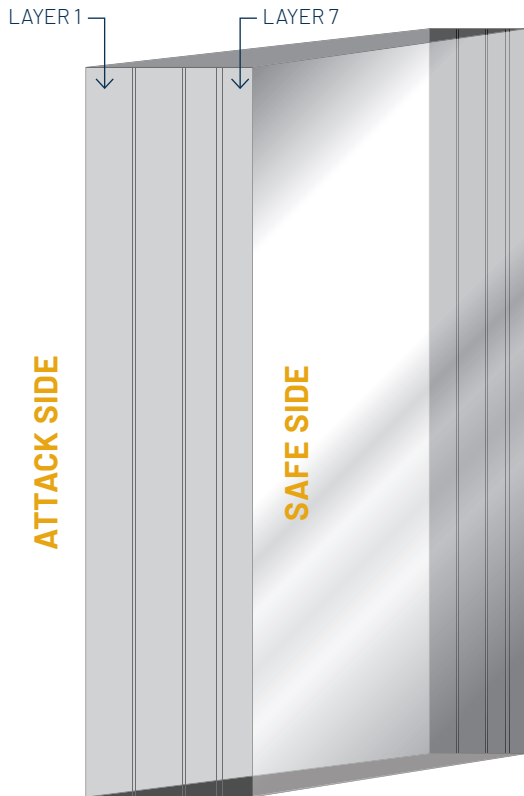

## PRODUCT MAKEUP

- Layer 1: 3/8" Glass
- Layer 2: .025 Urethane
- Layer 3: 3/8" Glass
- Layer 4: .025 Urethane
- Layer 5: 1/4" Glass
- Layer 6: .05 Urethane
- Layer 7: 1/4" Mar Resistant Polycarbonate

## OPTIONS

- Tinted Glass (Gray, Bronze, Green, Blue)
- Reflective Glass
- One-way Mirror
- Translucent
- White Interlayer (Frosted Glass)
- Wire Glass; Insulating Units; Low E
- \*More Option Available

Size and Thickness may not be available for every option

## TECHNICAL DETAILS

- Ballistic UL 752 Level 4
- Nominal Thickness: 1.35"
- Nominal Weight: 14.78 lbs/ square foot
- Light Transmission: 67%
- Dimensional Tolerance: ASTM C 1349

## STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings  
ASTM C 1036 Standard Specification for Flat Glass  
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass



[sales@SafeWoodDesigns.com](mailto:sales@SafeWoodDesigns.com)



844.896.1800



[www.SafeWoodDesigns.com](http://www.SafeWoodDesigns.com)