




**SAFEWOOD**  
DESIGNS

# BALLISTIC GLASS CLAD LAMINATE

SWD 008 AP 2-1/4"

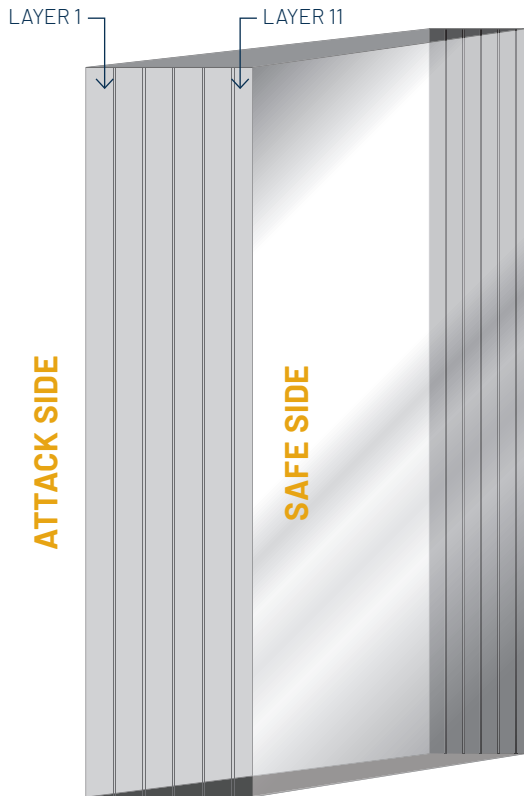

## PRODUCT MAKEUP

- Layer 1: 3/8" Glass
- Layer 2: .025 Urethane
- Layer 3: 3/8" Glass
- Layer 4: .025 Urethane
- Layer 5: 3/8" Glass
- Layer 6: .025 Urethane
- Layer 7: 3/8" Glass
- Layer 8: .025 Urethane
- Layer 9: 3/8" Glass
- Layer 10: .05 Urethane
- Layer 11: 1/4" Mar Resistant Polycarbonate

## OPTIONS

- Tinted Glass (Gray, Bronze, Green, Blue)
- Reflective Glass, One-way Mirror
- Translucent, White Interlayer (Frosted Glass)
- Wire Glass; Insulating Units; Low E
- \*More Option Available

Size and Thickness may not be available for every option

## TECHNICAL DETAILS

- Ballistic UL 752 Level 7, 8
- NIJ Level 4
- Nominal Thickness: 2.275"
- Nominal Weight: 26.71 lbs/ square foot
- Light Transmission: 61%
- Dimensional Tolerance: ASTM C 1349

## STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings  
ASTM C 1036 Standard Specification for Flat Glass  
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass



[sales@SafeWoodDesigns.com](mailto:sales@SafeWoodDesigns.com)



844.896.1800



[www.SafeWoodDesigns.com](http://www.SafeWoodDesigns.com)