




SAFEWOOD
DESIGNS

BALLISTIC GLASS CLAD LAMINATE

SWD 3000 1-1/4"

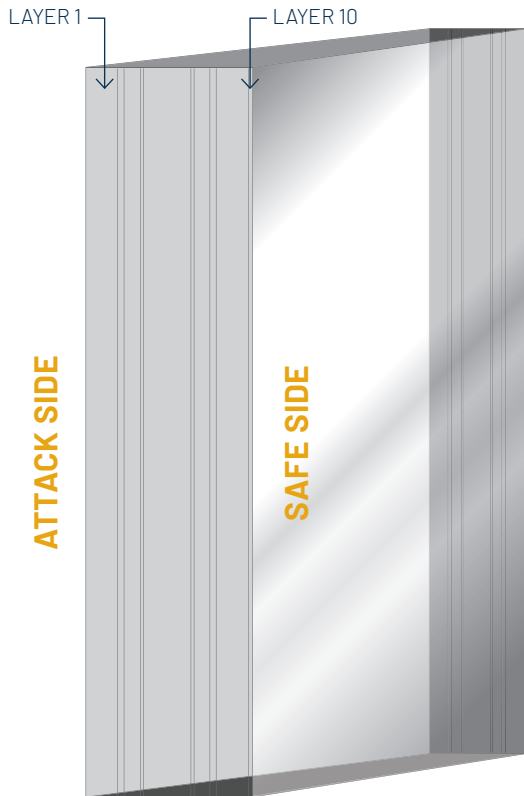

PRODUCT MAKEUP

- Layer 1: 1/4" Heat Strengthened Glass
- Layer 2: .025 Urethane
- Layer 3: 1/8" Polycarbonate
- Layer 4: .025 Urethane
- Layer 5: 3/8" Polycarbonate
- Layer 6: .025 Urethane
- Layer 7: 1/8" Polycarbonate
- Layer 8: .05 Urethane
- Layer 9: 1/4" Heat Strengthened Glass
- Layer 10: .037 Spall Shield

OPTIONS

- Tinted Glass (Gray, Bronze, Green, Blue)
- Reflective Glass
- One-way Mirror
- Translucent
- White Interlayer (Frosted Glass)
- Wire Glass; Insulating Units; Low E
- *More Option Available

TECHNICAL DETAILS

- Ballistic UL 752 Level 3 & 6
- HP White TP-0500.02 Level 3
- WMFL Level 1
- Nominal Thickness: 1.24"
- Nominal Weight: 10.7 lbs/ square foot
- Light Transmission: 67%
- Dimensional Tolerance: ASTM C 1349

STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings
ASTM C 1036 Standard Specification for Flat Glass
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass



sales@SafeWoodDesigns.com



844.896.1800



www.SafeWoodDesigns.com