




**SAFEWOOD**  
DESIGNS

# BALLISTIC GLASS CLAD LAMINATE

SWD 3500 1-1/4"

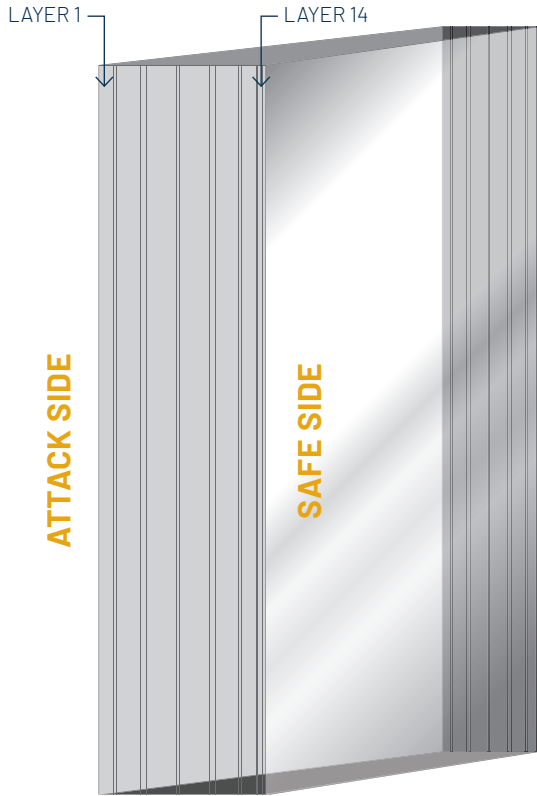

## PRODUCT MAKEUP

- Layer 1: 1/8" Heat Strengthened Glass
- Layer 2: .025 Urethane
- Layer 3: 3/16" Glass
- Layer 4: .05 Urethane
- Layer 5: 1/4" Polycarbonate
- Layer 6: .025 Urethane
- Layer 7: 1/4" Polycarbonate
- Layer 8: .05 Urethane
- Layer 9: 3/16" Heat Strengthened Glass
- Layer 10: .025 Urethane
- Layer 11: 1/8" Glass
- Layer 12: .015 Urethane
- Layer 13: 1/32" Polycarbonate
- Layer 14: .022 Spall Shield

## TECHNICAL DETAILS

- Ballistic UL 752 Level 3
- HP White TP-0500.02 Level 3
- WMFL Level 1
- Nominal Thickness: 1.26"
- Nominal Weight: 10.7 lbs/ square foot
- Light Transmission: 67%
- Dimensional Tolerance: ASTM C 1349

## STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings  
ASTM C 1036 Standard Specification for Flat Glass  
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass s

## OPTIONS

Tinted Glass (Gray, Bronze, Green, Blue), Reflective Glass, One-way Mirror, Translucent, White Interlayer (Frosted Glass), Wire Glass; Insulating Units; Low E

\*More Option Available

Size and Thickness may not be available for every option



[sales@SafeWoodDesigns.com](mailto:sales@SafeWoodDesigns.com)



844.896.1800



[www.SafeWoodDesigns.com](http://www.SafeWoodDesigns.com)