




SAFEWOOD
DESIGNS

BALLISTIC GLASS CLAD LAMINATE

SWD 50 CAL BALL 3"

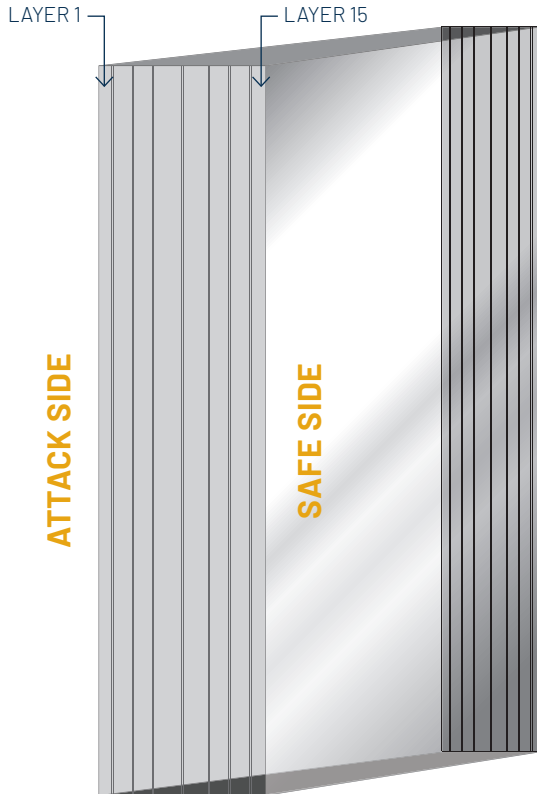

PRODUCT MAKEUP

- Layer 1: 1/4" Glass
- Layer 2: .025 Urethane
- Layer 3: 3/8" Glass
- Layer 4: .025 Urethane
- Layer 5: 3/8" Glass
- Layer 6: .025 Urethane
- Layer 7: 1/2" Glass
- Layer 8: .025 Urethane
- Layer 9: 1/2" Glass
- Layer 10: .025 Urethane
- Layer 11: 3/8" Glass
- Layer 12: .025 Urethane
- Layer 13: 3/8" Glass
- Layer 14: .05 Urethane
- Layer 15: 1/4" Mar Resistant Polycarbonate

TECHNICAL DETAILS

- HP White 50 CAL Ball
- Ballistic UL 752 Level 10
- Nominal Thickness: 3"
- Nominal Weight: 39 lbs/ square foot
- Light Transmission: 61%
- Dimensional Tolerance: ASTM C 1349

STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings
 ASTM C 1036 Standard Specification for Flat Glass
 ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass s

OPTIONS

Tinted Glass (Gray, Bronze, Green, Blue), Reflective Glass, One-way Mirror, Translucent, White Interlayer (Frosted Glass), Wire Glass; Insulating Units; Low E

*More Option Available

Size and Thickness may not be available for every option



sales@SafeWoodDesigns.com



844.896.1800



www.SafeWoodDesigns.com