




SAFEWOOD
DESIGNS

BALLISTIC GLASS CLAD LAMINATE

SWD 5000 1-5/8"

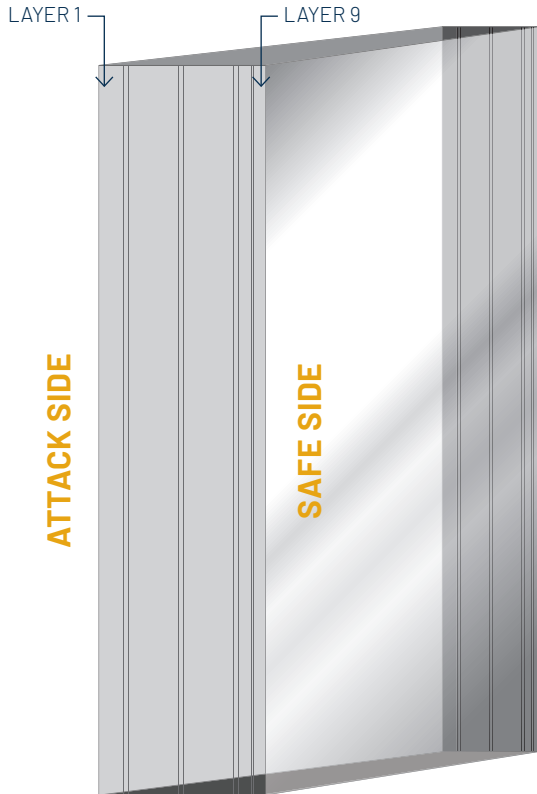

PRODUCT MAKEUP

- Layer 1: 1/4" Glass
- Layer 2: .05 Urethane
- Layer 3: 1/2" Glass
- Layer 4: .05 Urethane
- Layer 5: 1/2" Glass
- Layer 6: .05 Urethane
- Layer 7: 1/8" Polycarbonate
- Layer 8: .025 Urethane
- Layer 9: 1/8" Mar Resistant Polycarbonate

OPTIONS

- Tinted Glass (Gray, Bronze, Green, Blue)
- Reflective Glass
- One-way Mirror
- Translucent
- White Interlayer (Frosted Glass)
- Wire Glass; Insulating Units; Low E
- *More Option Available

Size and Thickness may not be available for every option

TECHNICAL DETAILS

- NIJ Level 3 B-6 7.62 NATO
- Nominal Thickness: 1.64"
- Nominal Weight: 19.3 lbs/ square foot
- Light Transmission: 68%
- Dimensional Tolerance: ASTM C 1349

STANDARDS

ANSI Z97.1-1984 Safety Glazing Materials for Buildings
ASTM C 1036 Standard Specification for Flat Glass
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass



sales@SafeWoodDesigns.com



844.896.1800



www.SafeWoodDesigns.com